



T6 & T7 系列高压叶片泵

工业用泵



DENISON Hydraulics

转速及压力

规格系列	泵芯规格	理论排量	最低转速	最高转速	最高间歇压力	最高连续压力
		ml/rev	rpm	rpm	bar	bar
B	B02	5.8	600	3600	320	290
	B03	9.8				
	B04	12.8				
	B05	15.9				
	B06	19.6				
	B07	22.5				
	B08	24.8				
	B09	27.9				
	B10	31.5				
	B11	35.0				
	B12	40.5				
	B14	44.2				
	B15	49.4				
	C	003	10.8	600	2800	280
005		17.2				
006		21.3				
008		26.4				
010		34.1				
012		37.1				
014		46.0				
017		58.3				
020		63.8				
022		70.3				
025		79.3				
028		88.8				
031		100.0				
T6D	014	47.5	600	2500	240	210
	017	57.9				
	020	65.7				
	024	79.1				
	028	88.9				
	031	97.9				
	035	112.4				
	038	120.7				
	042	136.0				
	045	146.0				
	050	156.7				
	T7D	061	189.5	600	3000	300
B14		43.2				
B17		54.0				
B20		64.8				
B22		70.3				
B24		79.6				
B28		88.4				
B31		97.4				
B35		111.4				
B38		118.5				
B42		135.3				
045		145.7				
050	158.0					
E	042	132.3	600	2200	240	210
	045	142.4				
	050	158.5				
	052	164.8				
	054	171.0				
	057	183.3				
	062	196.7				
	066	213.3				
	072	227.1				
	085	268.7				
			2000	90	75	

主要技术参数

规格系列	规格	排量 ml/rev	输出流量, l/min & n=1500 rpm			输入功率, kW & n=1500 rpm		
			P=0 bar	P=140 bar	P=290 bar	P=7 bar	P=140 bar	P=290 bar
T67B T7BS T67BB T67CB T67DB T7DBS T7EBS	B02*	5.8	8.7	7.0	4.4/240bar	0.5	2.7	4.4/240bar
	B03	9.8	14.7	13.0	9.5	0.6	4.1	8.1
	B04	12.8	19.2	17.5	13.9	0.6	5.2	10.4
	B05	15.9	23.9	22.1	18.6	0.7	6.3	12.6
	B06	19.6	29.4	27.7	23.8	0.7	7.6	15.4
	B07	22.5	33.8	32.0	28.4	0.8	8.6	17.4
	B08	24.8	37.2	35.5	31.3	0.8	9.4	19.1
	B09	27.9	41.9	40.1	36.3	0.9	10.5	21.3
	B10	31.5	47.3	45.5	41.7	1.0	11.7	23.8
	B11	35.0	52.5	50.8	47.1	1.0	12.9	26.3
	B12*	40.5	60.8	59.0	55.6/270bar	1.1	14.9	28.4/270bar
	B14*	44.2	66.3	64.6	61.5/270bar	1.2	16.2	30.9/270bar
	B15*	49.4	74.1	72.4	68.9/270bar	1.3	18.0	34.3/270bar
规格系列	规格	排量 ml/rev	输出流量, l/min & n=1500 rpm			输入功率, kW & n=1500 rpm		
			P=0 bar	P=140 bar	P=240 bar	P=7 bar	P=140 bar	P=240 bar
T6C T67CB T6CC T6DC T67DC T6EC	003	10.8	16.2	11.2	7.7	1.3	5.3	8.4
	005	17.2	25.8	20.8	17.3	1.4	7.5	12.2
	006	21.3	31.9	26.9	23.4	1.5	8.9	14.7
	008	26.4	39.6	34.6	31.1	1.6	10.7	17.7
	010	34.1	51.1	46.1	42.6	1.7	13.4	22.3
	012	37.1	55.6	50.6	47.1	1.7	14.4	24.1
	014	46.0	69.0	64.0	60.5	1.9	17.6	29.5
	017	58.3	87.4	82.4	78.9	2.1	21.9	36.9
	020	63.8	95.7	90.7	87.2	2.2	23.8	40.2
	022	70.3	105.4	100.4	96.9	2.3	26.1	44.1
	025	79.3	118.9	113.9	110.4	2.5	29.2	49.5
	028*	88.8	133.2	128.2	125.8/210bar	2.8	32.7	48.5 /210bar
	031*	100.0	150.0	145.0	142.6/210bar	2.8	36.5	54.5 /210bar
T6D T67DB T6DC T6ED	014	47.5	71.3	54.9	43.3	2.3	18.5	30.7
	017	57.9	87.1	70.7	59.1	2.5	22.2	37.0
	020	65.7	98.7	82.3	70.6	2.7	24.9	41.7
	024	79.1	118.9	102.5	90.8	2.9	29.7	49.8
	028	88.9	133.5	117.1	105.5	3.1	33.2	55.9
	031	97.9	147.1	130.7	119.1	3.2	36.2	61.1
	035	112.4	168.9	152.6	140.9	3.4	40.7	68.7
	038	120.7	181.3	165.0	153.3	3.6	43.9	74.3
	042	136.0	204.4	188.0	176.3	3.9	49.4	83.7
	045	146.0	219.3	202.9	191.3	4.0	52.8	89.5
	050*	156.7	235.5	219.2	211.0/210bar	4.3	57.1	85.0/210bar
	061*	189.5	284.8	272.1/100bar	-	5.2	70.9/100bar	-

主要技术参数

规格系列	规格	排量 ml/rev	输出流量, l/min & n=1500 rpm			输入功率, kW & n=1500 rpm		
			P=0 bar	P=140 bar	P=240 bar	P=7 bar	P=140 bar	P=240 bar
T7DS T7DBS T67DC T7EDS	B14	43.2	64.8	58.2	53.1	1.5	16.9	29.6
	B17	54.0	81.0	74.4	69.3	1.7	20.7	36.4
	B20	64.8	97.2	90.6	85.5	1.9	24.5	43.1
	B22	70.3	105.5	98.9	93.7	2.0	26.4	46.6
	B24	79.6	119.4	112.8	107.7	2.1	29.6	52.4
	B28	88.4	132.6	126.0	120.9	2.3	32.7	57.9
	B31	97.4	146.1	139.5	134.4	2.5	35.9	63.5
	B35	111.4	167.1	160.5	155.4	2.7	40.8	72.2
	B38	118.5	177.8	171.2	166.0	2.8	43.2	76.7
	B42	135.3	203.0	196.4	191.2	3.1	49.1	87.2
	045	145.7	218.6	209.5	203.1	4.0	52.8	89.5
	050*	158.0	237.0	228.0	223.4/210bar	4.3	57.1	85.0/210bar
T6E T7ES T7EBS T6EC T6ED T7EDS	042	132.3	198.5	188.5	181.3	5.2	49.4	82.6
	045	142.4	213.6	203.6	196.5	5.4	52.9	88.7
	050	158.5	237.7	227.7	220.6	5.7	58.5	98.3
	052	164.8	247.2	237.2	230.1	5.8	60.8	102.1
	054	171.0	256.5	246.5	239.4	5.9	63.0	105.8
	057	183.3	275.0	265.0	257.9	6.1	67.3	113.2
	062	196.7	295.0	285.0	277.9	6.4	71.9	121.3
	066	213.3	319.9	309.0	302.8	6.7	77.7	131.2
	072	227.1	340.6	330.6	323.5	6.9	82.6	139.5
	085*	268.7	403.0	392.0/90bar	-	9.1	65.8/90bar	-

注：以上参数仅为矿物油基抗磨液压油所适用。

T67B 单联泵型号说明

型号		T67B		-B10	-1	R	00	-A	1	00
高压叶片泵, 安装法兰 SAE B		2 螺孔.								
排量 : ml / rev										
B02=5.8, B03=9.8, B04=12.8, B05=15.9, B06=19.6,										
B07=22.5, B08=24.8, B09=27.9, B10=31.5, B11=35.0,										
B12=40.5, B14=44.2, B15=49.4										
传动轴形式 :										
-1	SAE B 平键		-2	non SAE 平键						
-3	SAE B 花键		-4	SAE BB 花键						
转向 :		R: 右转 (顺时针) L: 左转 (逆时针)								
油口方向组合 :		S = 进油口 P = 出油口								
代号	00 (标准配置)		01		02		03			
油口 方向										
设计序号 :		A : 由生产商给定								






密封等级:

1: S1 - 丁晴橡胶: 矿物液压油





5: S5 - 氟橡胶: 矿物基与抗
燃液压油

T67B 单联泵安装尺寸

重量: 15.7kg

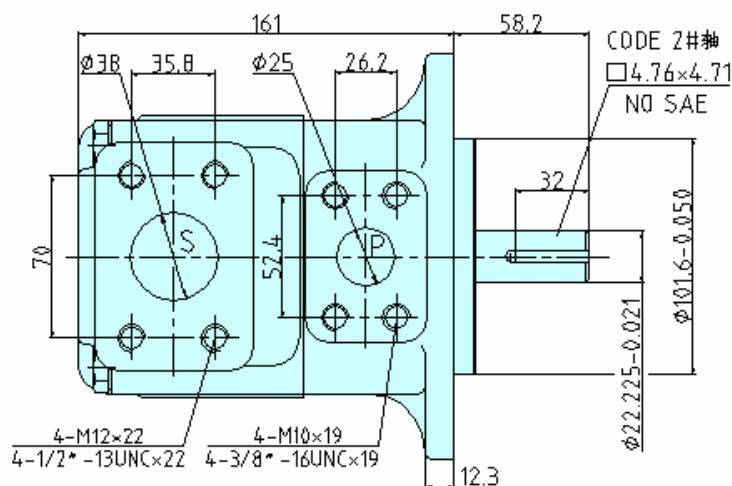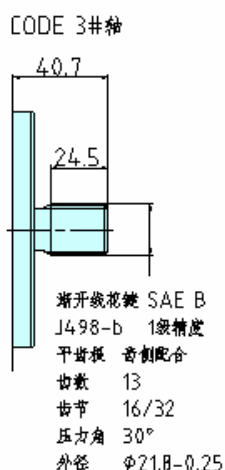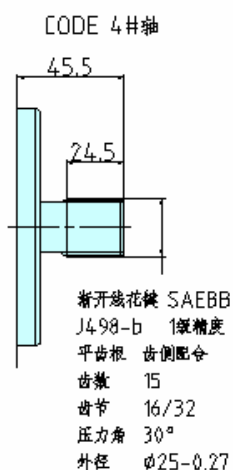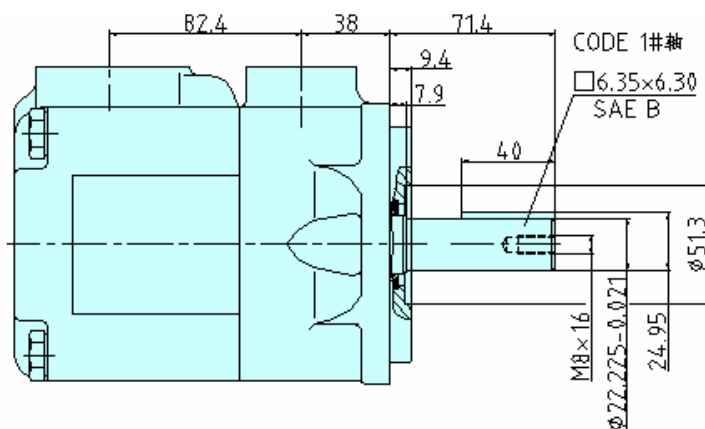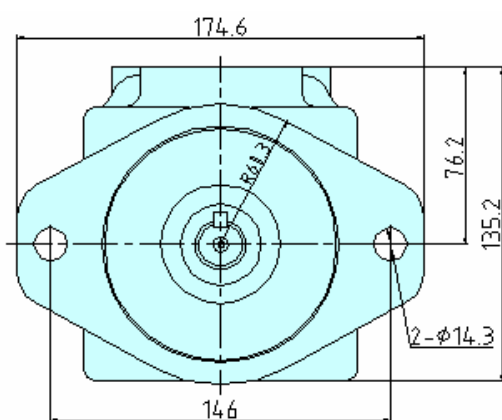


T7BS 单联泵型号说明




型号	T7BS	-B10	-1	R	00	-A	1	M0
高压叶片泵, 安装法兰 SAE B 2 螺孔.								油口联接螺纹
排量: ml / rev								公制
B02=5.8, B03=9.8, B04=12.8, B05=15.9, B06=19.6,								美制
B07=22.5, B08=24.8, B09=27.9, B10=31.5, B11=35.0,								
B12=40.5, B14=44.2, B15=49.4								
传动轴形式:								
-1	SAE B 平键	-2	non SAE 平键					
-3	SAE B 花键	-4	SAE BB 花键					
转向:		R: 右转 (顺时针) L: 左转 (逆时针)						
油口方向组合:		S = 进油口 P = 出油口						
代号	00 (标准配置)	01	02	03				
油口 方向								
设计序号:					A: 由生产商给定			

T7BS 单联泵安装尺寸 重量：23kg

重量：23kg

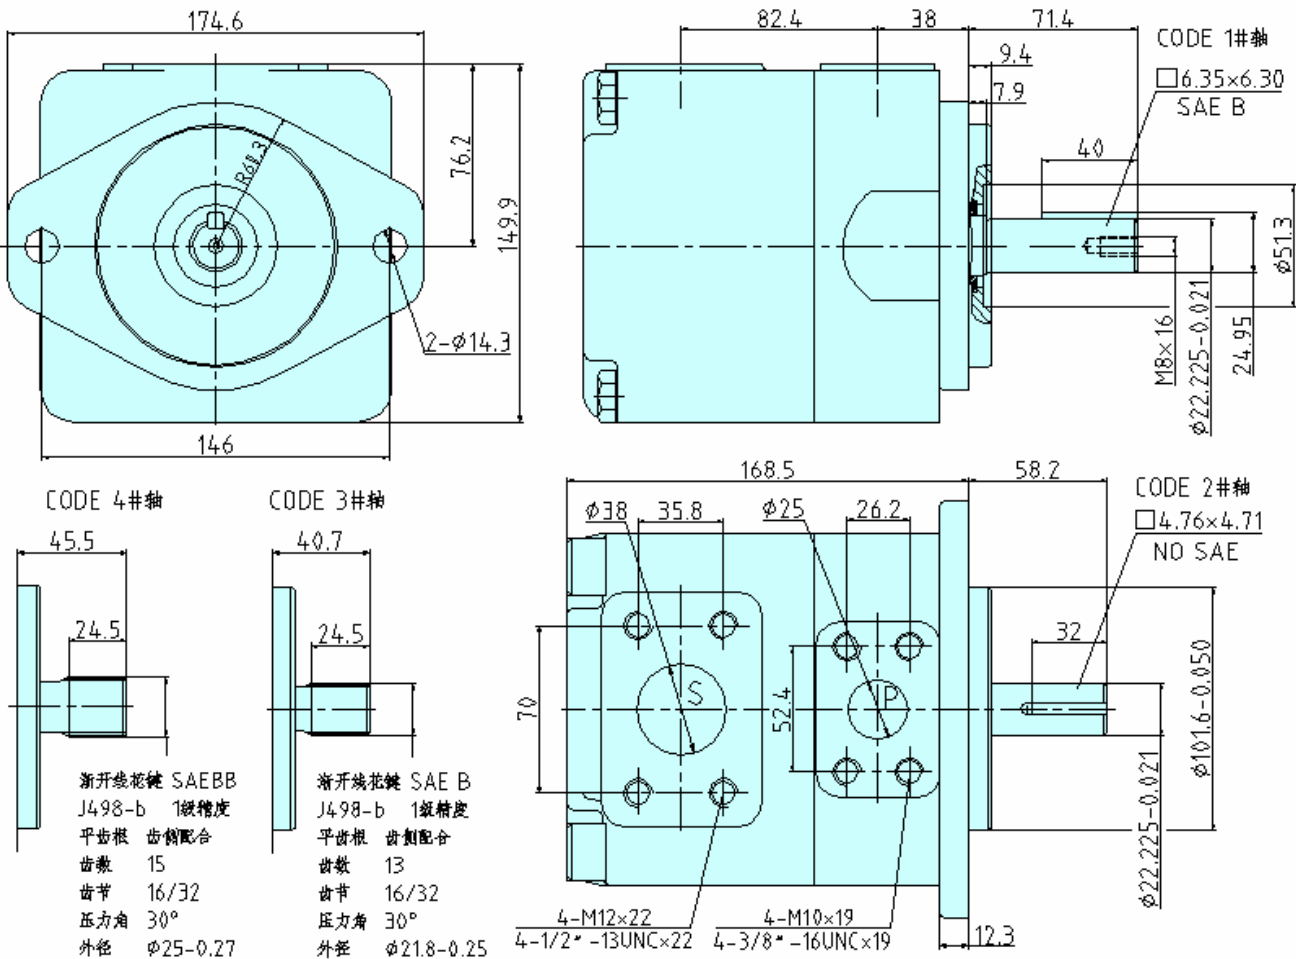


T6C 单联泵型号说明

型号		T6C		-022	-1	R	00	-B	1	M0	
高压叶片泵, 安装法兰 SAE B 2 螺孔.										油口联接螺纹	
排量 : ml / rev										公制	美制
003=10.8, 005=17.2, 006=21.3, 008=26.4, 010=34.1,										M0	00(略)
012=37.1, 014=46.0, 017=58.3, 020=63.8, 022=70.3,											
025=79.3, 028=88.8, 031=100.0											
传动轴形式 :										密封等级 :	
-1	SAE B 平键	-2	non SAE 平键							1: S1 - 丁晴橡胶 :矿物液液压油	
-3	SAE B 花键	-4	SAE BB 花键							5: S5 - 氟橡胶 :矿物基与抗燃液压油	
转向 :		R: 右转 (顺时针)		L: 左转 (逆时针)							
油口方向组合 :		S = 进油口		P = 出油口							
代号	00 (标准配置)		01	02	03						
油口方向										设计序号 :	
										B : 由生产商给定	

T6C 单联泵安装尺寸

重量: 15.7kg

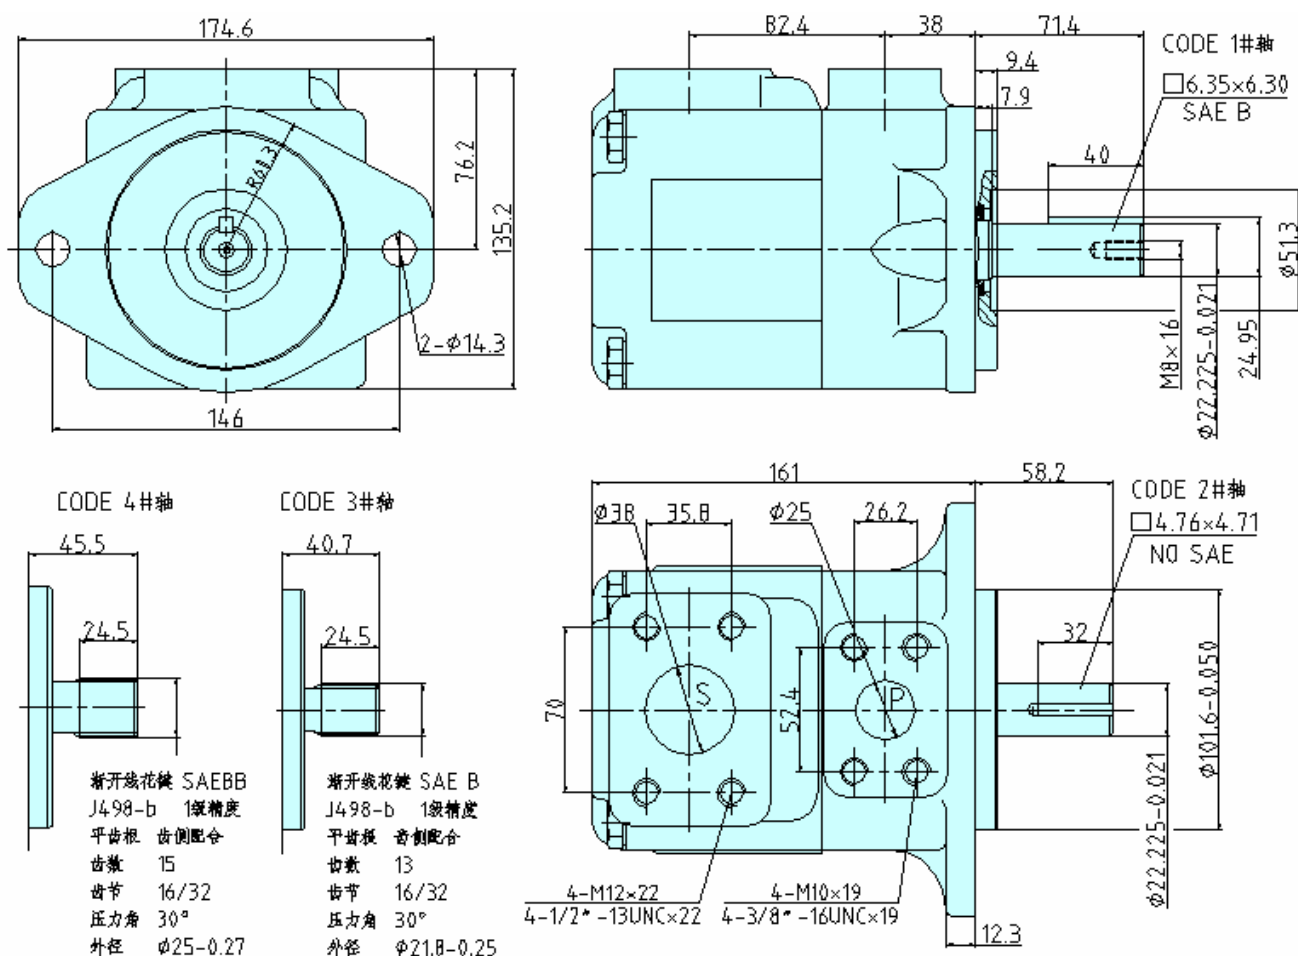


T6D 单联泵型号说明



型号	T6D	-042	-1	R	00	-B	1	M0
高压叶片泵, 安装法兰 SAE C 2 螺孔.								油口联接螺纹
排量: ml/rev 014=47.5, 017=57.9, 020=65.7, 024=79.1, 028=88.9, 031=97.9 035=112.4, 038=120.7, 042=136.0, 045=146.0, 050=156.7, 061=189.5								公制
传动轴形式:								美制
-1	SAE C 平键	-2	non SAE 平键					
-3	SAE C 花键	-4	non SAE 花键					
转向: R: 右转 (顺时针) L: 左转 (逆时针)								密封等级:
油口方向组合: S = 进油口 P = 出油口								1: S1 - 丁晴橡胶: 矿物液液压油
代号	00 (标准配置)	01	02	03				
油口方向								
设计序号:								5: S5 - 氟橡胶: 矿物基与抗燃液液压油
B: 由生产商给定								

T6D 单联泵安装尺寸

重量: 26.0kg

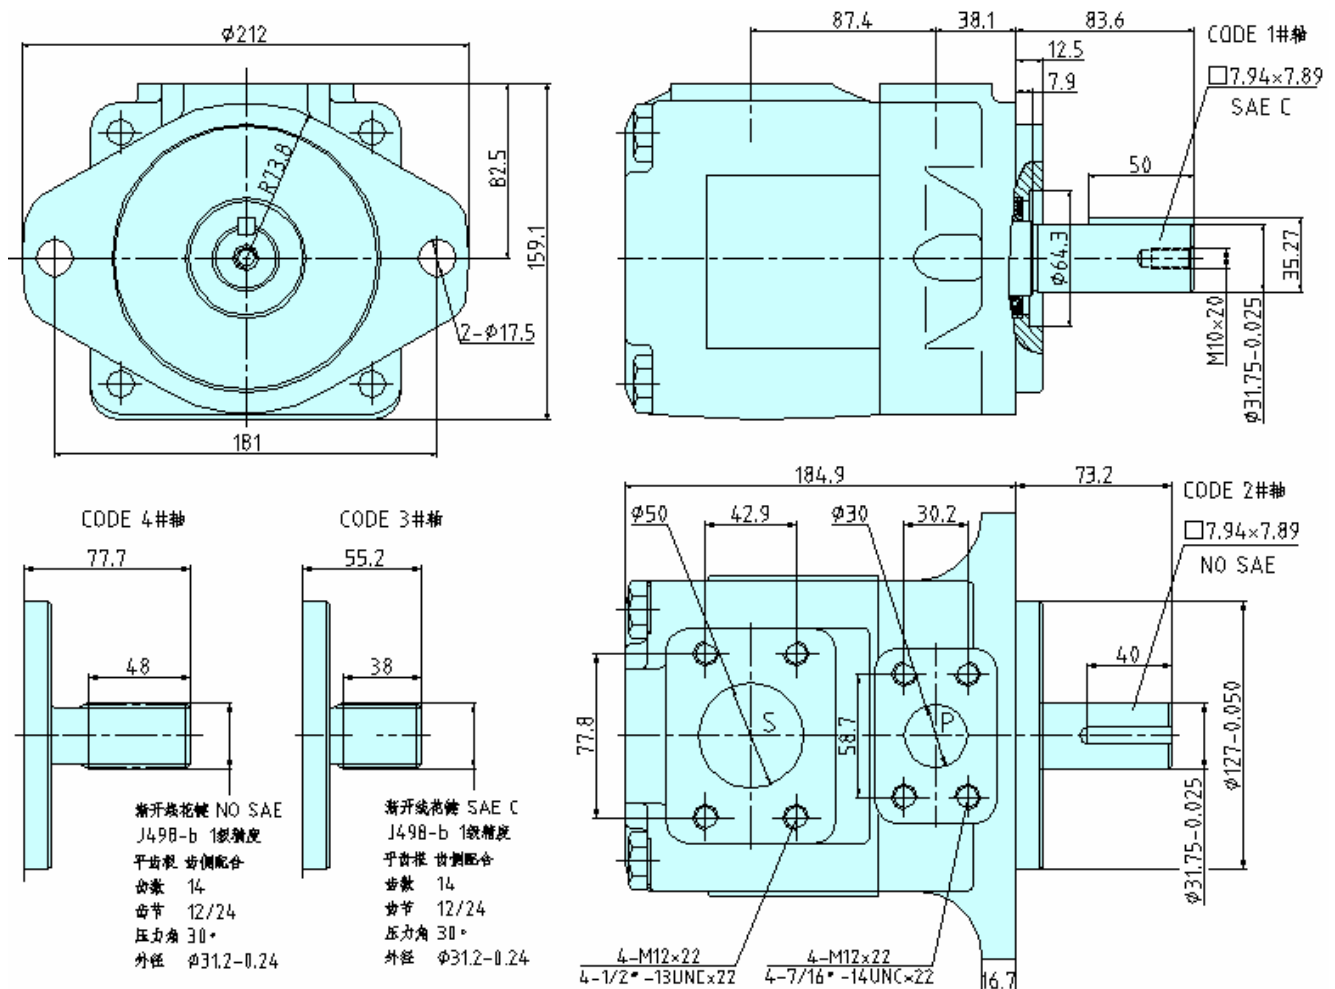


T7DS 单联泵型号说明

型号		T7DS		-B42		-1		R		00		-A		1		00	
高压叶片泵, 安装法兰 SAE C		2 螺孔.														油口联接螺纹	
排量 : ml / rev																公制	
B14=43.2, B17=54.0, B20=64.8, B22=70.3, B24=79.6, B28=88.4,																美制	
B31=97.4, B35=111.4, B38=118.5, B42=135.3, 045=145.7, 050=158.0																M0	
传动轴形式 :																00	
-1		SAE C 平键		-2		non SAE 平键											
-3		SAE C 花键		-4		non SAE 花键											
转向 :		R: 右转 (顺时针)		L: 左转 (逆时针)													
油口方向组合 :		S = 进油口		P = 出油口													
代号		00 (标准配置)		01		02		03									
油口 方向																	

T7DS 单联泵安装尺寸 重量：26.0kg

重量：26.0kg

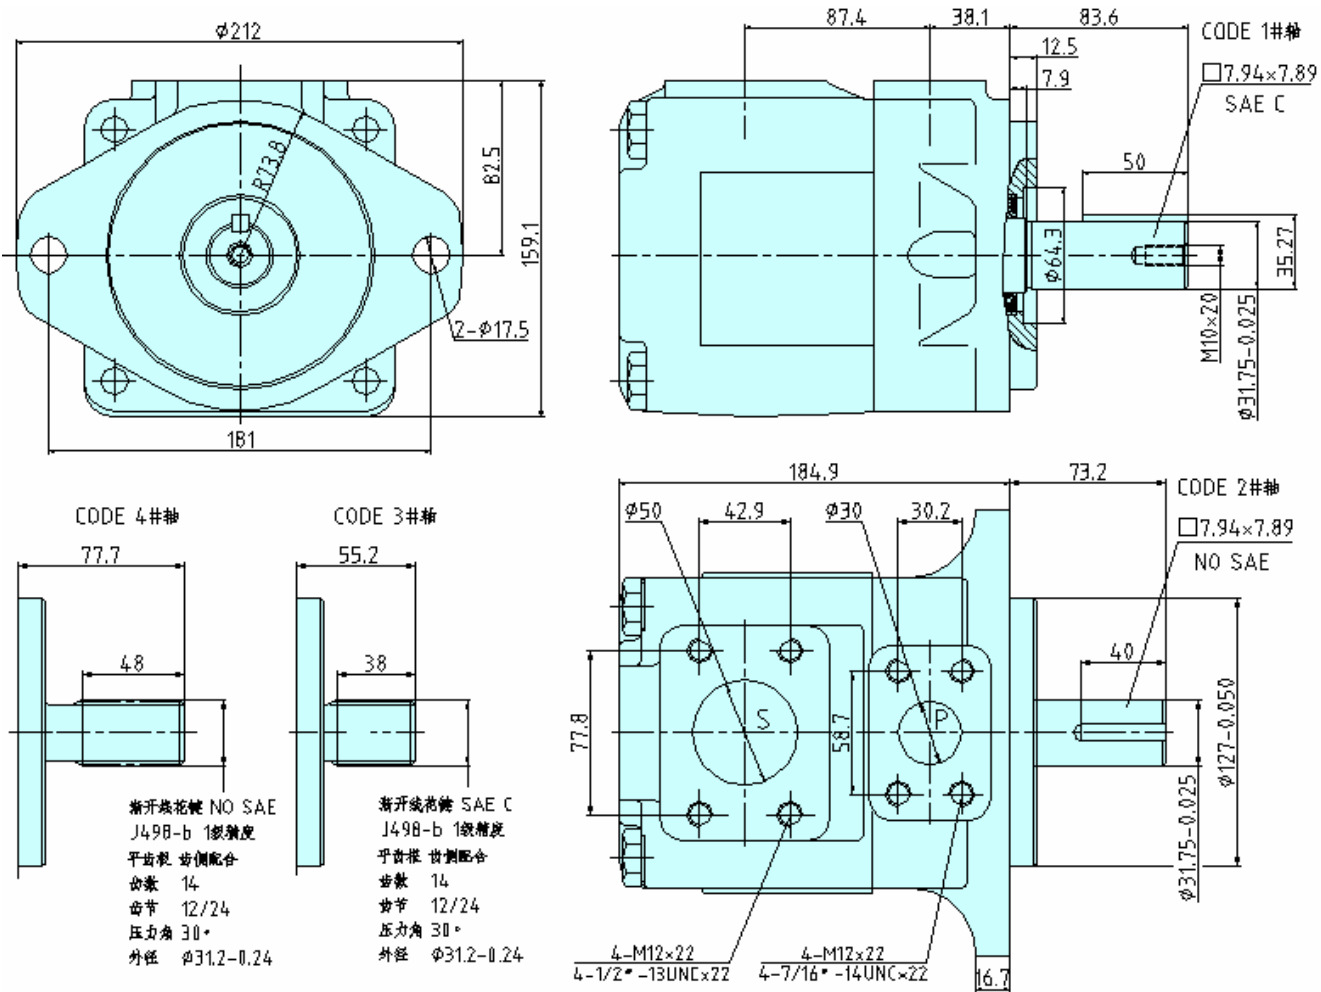


T6E 单联泵型号说明





型号	T6E	-072	-1	R	00	-A	1	M0
高压叶片泵, 安装法兰 SAE C 2 螺孔.								油口联接螺纹
排量: ml/rev 042 = 132.3, 045 = 142.4, 050 = 158.5, 052 = 164.8, 054 = 171.0, 057 = 183.3, 062 = 196.7, 066 = 213.3, 072 = 227.1, 085 = 268.7								公制
传动轴形式:								美制
-1	SAE CC 平键	-2	non SAE 平键					
-3	SAE C 花键	-4	SAE CC 花键					
转向: R: 右转 (顺时针) L: 左转 (逆时针)								密封等级:
油口方向组合: S = 进油口 P = 出油口								1: S1 - 丁晴橡胶: 矿物液压油
代号	00 (标准配置)	01	02	03				
油口方向								
设计序号: A: 由生产商给定								5: S5 - 氟橡胶: 矿物基与抗燃油

T6E 单联泵安装尺寸

重量: 43.3kg

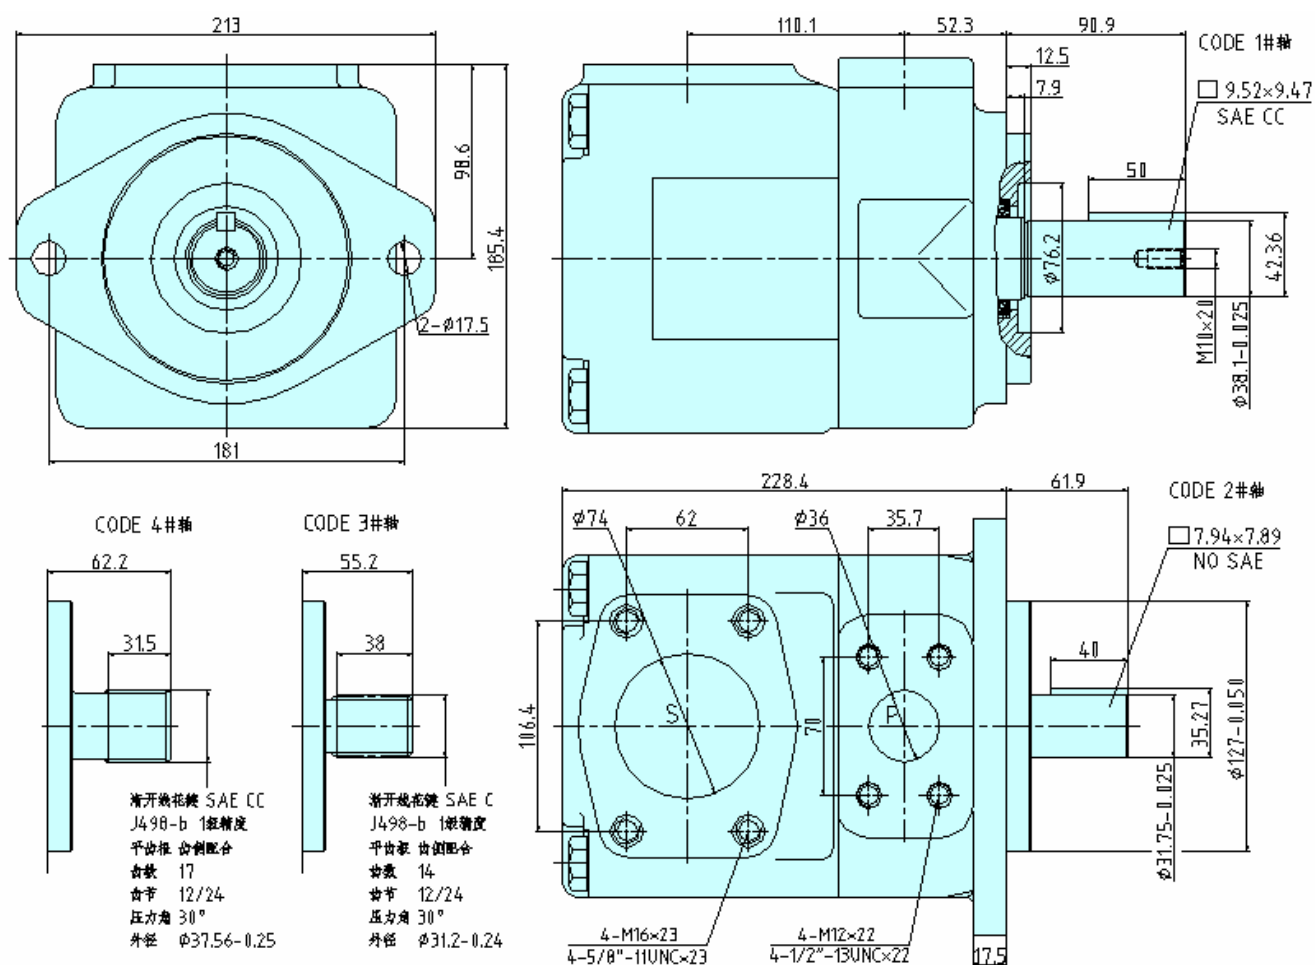

T7ES 单联泵型号说明

型号	T7ES	-072	-1	R	00	-A	1	00
高压叶片泵, 安装法兰 SAE C 2 螺孔.								油口联接螺纹
排量: ml/rev								公制
042 = 132.3, 045 = 142.4, 050 = 158.5, 052 = 164.8, 054 = 171.0,								美制
057 = 183.3, 062 = 196.7, 066 = 213.3, 072 = 227.1, 085 = 268.7								M0
传动轴形式:								00
-1	SAE CC 平键	-2	non SAE 平键					
-3	SAE C 花键	-4	SAE CC 花键					
转向:		R: 右转 (顺时针) L: 左转 (逆时针)						
油口方向组合:		S = 进油口 P = 出油口						
代号	00 (标准配置)	01	02	03				
油口方向								
					设计序号:			
					A: 由生产商给定			


密封等级:

1: S1 - 丁晴橡胶: 矿物液压油

5: S5 - 氟橡胶: 矿物基与抗燃油

T7ES 单联泵安装尺寸

重量: 43.3kg

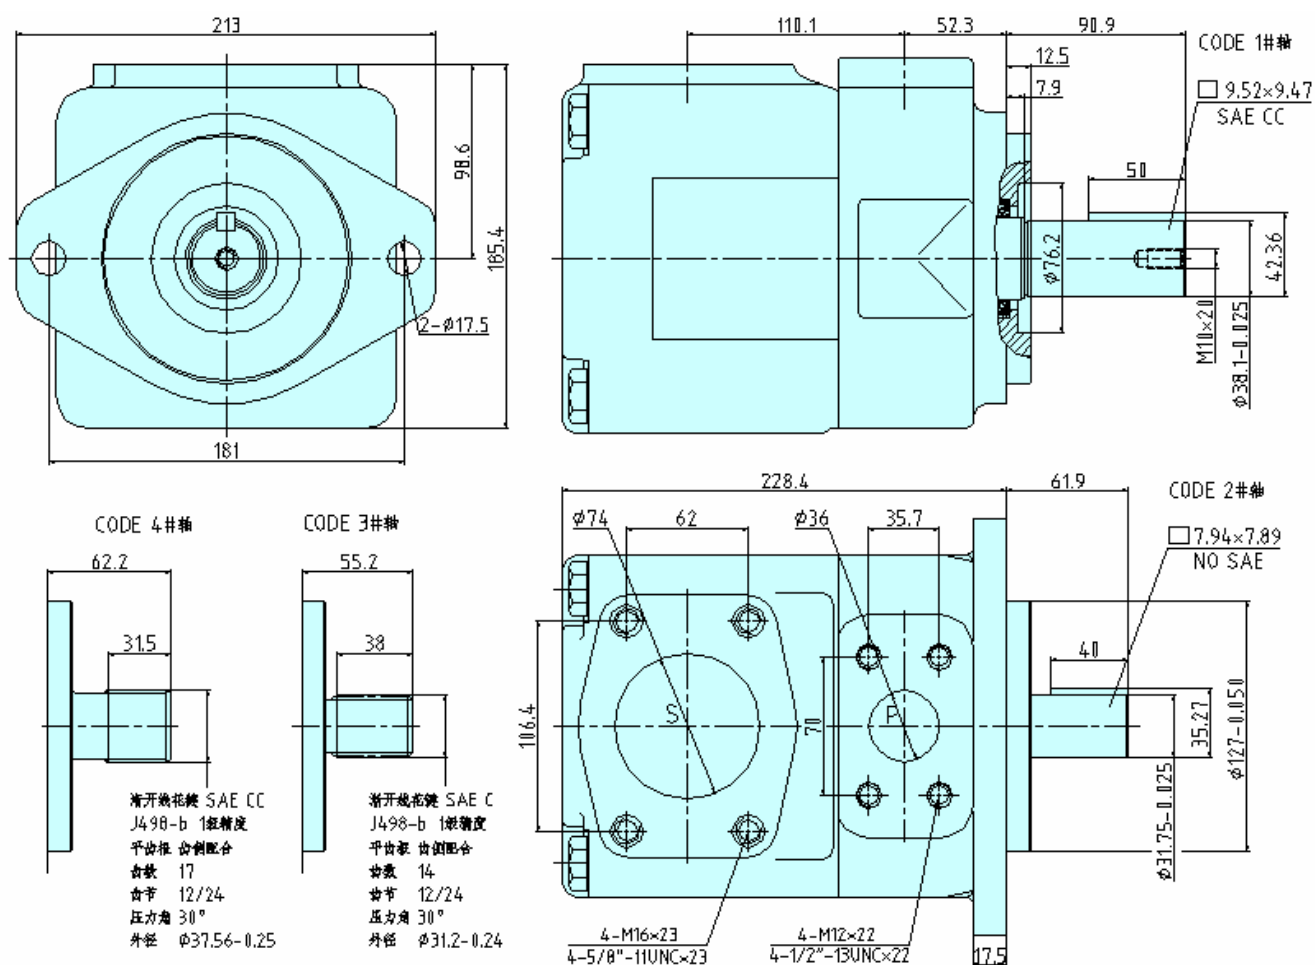


T67BB 双联泵型号说明

型号	T67BB(W)		-B10 -B10	-1	R	00	-A	1	00
高压叶片泵, 安装法兰 SAE B 2 螺孔.									
W-重载轴									
P1 与 P2 排量 : ml / rev									
B02=5.8, B03=9.8, B04=12.8,B05=15.9,B06=19.6,B07=22.5, B08=24.8, B09=27.9, B10=31.5, B11=35.0, B12=40.5, B14=44.2, B15=49.4									
传动轴形式 :									
-1	non SAE 平键	-2 (W)	SAE BB 平键						
-3	SAE BB 花键	-5	SAE B 花键						
转向 :				R: 右转 (顺时针)		L: 左转 (逆时针)			
油口方向组合 :				S = 进油口		P1 , P2 = 出油口		详见第 22 页	
设计序号 :				A : 由生产商给定					
密封等级 :				1: S1—丁晴橡胶: 矿物液液压油		5: S5— 氟橡胶: 矿物基与抗燃液液压油			
油口连接螺纹 :									
	公制			美制					
	M0	M1	00	01					
S	2 1/2"	2 1/2"	2 1/2"	2 1/2"					
P1	1"	1"	1"	1"					
P2	1"	3/4"	1"	3/4"					

T67BB 双联泵安装尺寸

重量: 26.0kg

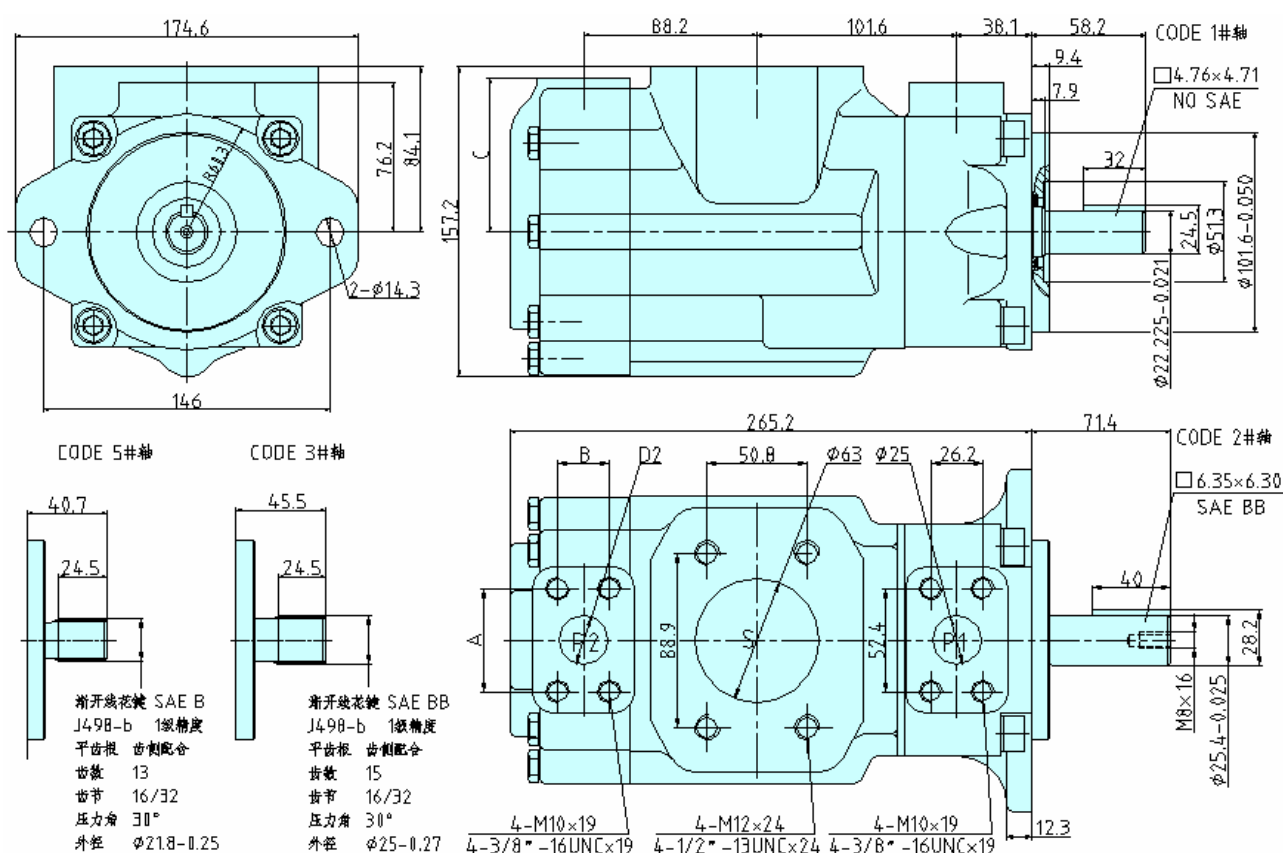


	D2=1"	D2=3/4"
A	52.4	47.7
B	26.2	22.2
C	74.7	76.2

T67CB 双联泵型号说明

型号	T67CB(W)	-010	-B10	-1	R	00	-A	1	00
高压叶片泵， 安装法兰 SAE B 2 螺孔。 W-重载轴									
P1 排量：ml / rev 003=10.8,005=17.2,006=21.3,008=26.4,010=34.1,012=37.1,014=46.0 017=58.3, 020=63.8, 022=70.3, 025=79.3, 028=88.8, 031=100.0									
P2 排量：ml / rev B02=5.8, B03=9.8, B04=12.8, B05=15.9, B06=19.6, B07=22.5, B08=24.8, B09=27.9, B10=31.5, B11=35.0, B12=40.5, B14=44.2, B15=49.4									
传动轴形式：									
-1	non SAE 平键	-2 (W)	SAE BB 平键						
-3	SAE BB 花键	-5	SAE B 花键						
转向：		R: 右转（顺时针）		L: 左转（逆时针）					
油口方向组合：		S = 进油口		P1 , P2 = 出油口		详见第 22 页			
设计序号：		A : 由生产商给定							
密封等级：		1: S1 - 丁晴橡胶：矿物液压油		5: S5 - 氟橡胶：矿物基与抗燃液压油					
油口连接螺纹：									
	公制		美制						
	M0	M1	00	01					
S	2 1/2"	2 1/2"	2 1/2"	2 1/2"					
P1	1"	1"	1"	1"					
P2	1"	3/4"	1"	3/4"					

T67CB 双联泵安装尺寸 重量：26.0kg

重量：26.0kg

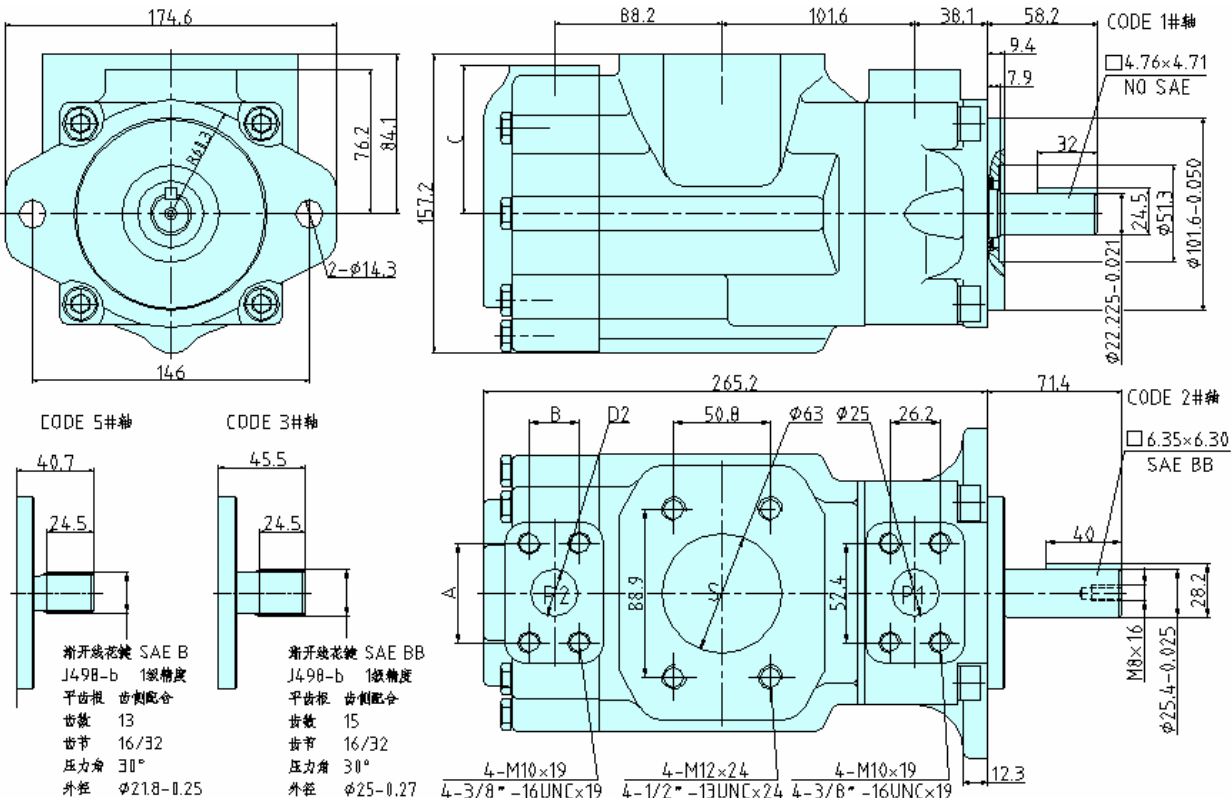


	D2=1"	D2=3/4"
A	52.4	47.7
B	26.2	22.2
C	74.7	76.2

T6CC 双联泵型号说明

型号		T6CC(W)		-022 -008	-1	R	00	-C	1	00
高压叶片泵, 安装法兰 SAE B 2 螺孔.										
W-重载轴										
P1 与 P2 排量 : ml / rev										
003=10.8, 005=17.2, 006=21.3,008=26.4,010=34.1,012=37.1, 014=46.0										
017=58.3, 020=63.8, 022=70.3, 025=79.3, 028=88.8, 031=100.0										
传动轴形式 :										
-1	non SAE 平键	-2 (W)	SAE BB 平键							
-3	SAE BB 花键	-5	SAE B 花键							
转向 :		R: 右转 (顺时针)		L: 左转 (逆时针)						
油口方向组合 :		S = 进油口		P1 , P2 = 出口口		详见第 22 页				
设计序号 :		C : 由生产商给定								
密封等级 :		1: S1- 丁晴橡胶 : 矿物液压油		5: S5- 氟橡胶 : 矿物基与抗燃液压油						
油口连接螺纹 :										
		公制				美制				
		0M	W0	1M	W1	00	01	10	11	
S		3"	3"	2 1/2"	2 1/2"	3"	3"	2 1/2"	2 1/2"	
P1		1"	1"	1"	1"	1"	1"	1"	1"	
P2		1"	3/4"	1"	3/4"	1"	3/4"	1"	3/4"	

T6CC 双联泵安装尺寸

重量: 26.0kg

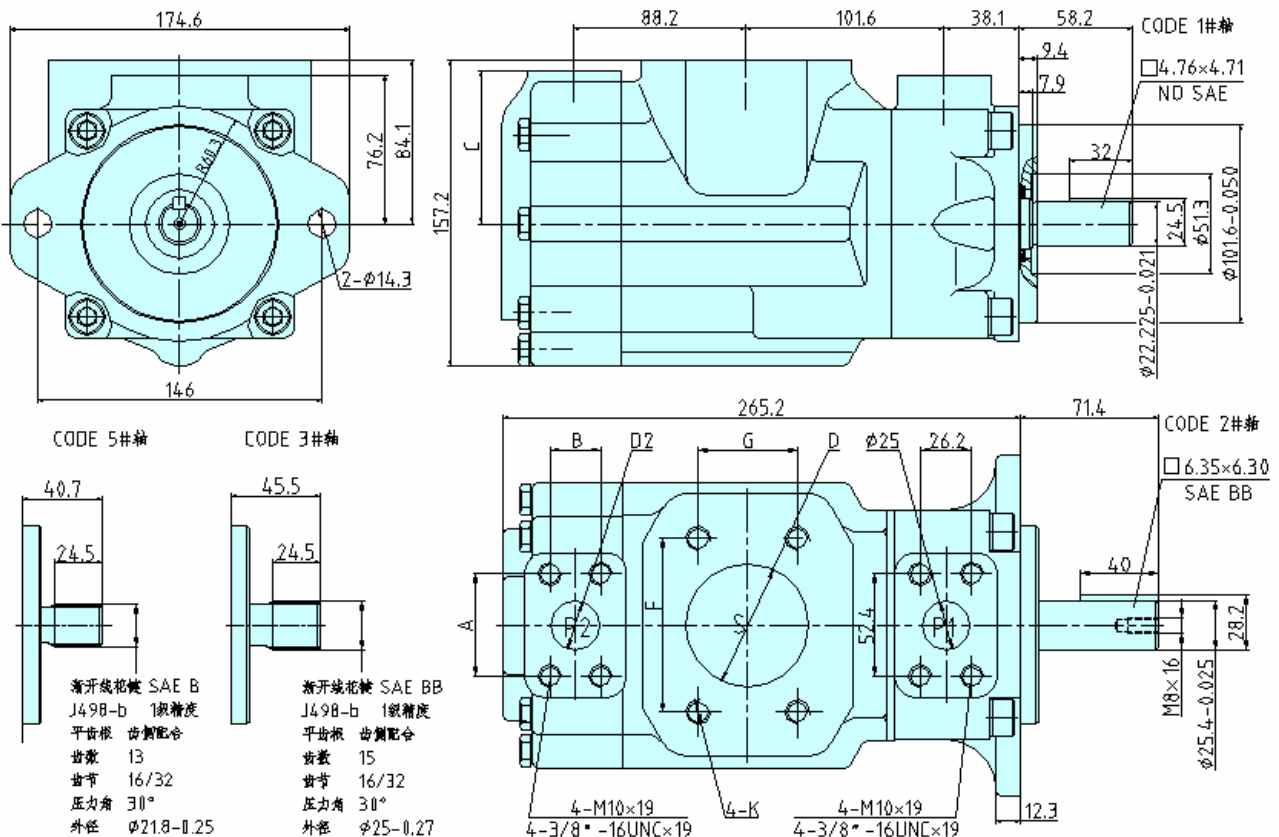

	D2=1"	D2=3/4"
A	52.4	47.7
B	26.2	22.2
C	74.7	76.2


	D = 3"	D = 2 1/2"
F	106.2	88.9
G	62	50.8
K 公制	M16×24	M12×24
K 美制	5/8" -11UNC×24	1/2" -13UNC×24

T67DB 双联泵型号说明

型号	T67DB(W)	-028	-B10	-1	R	00	-A	1	00
高压叶片泵, 安装法兰 SAE C 2 螺孔. W-重载轴									
P1 排量 : ml / rev 014=47.5, 017=57.9, 020=65.7, 024=79.1, 028=88.9, 031=97.9 035=112.4,038=120.7,042=136.0,045=146.0,050=156.7,061=189.5									
P2 排量 : ml / rev B02=5.8, B03=9.8, B04=12.8, B05=15.9, B06=19.6, B07=22.5, B08=24.8, B09=27.9, B10=31.5, B11=35.0, B12=40.5, B14=44.2, B15=49.4									
传动轴形式 :									
-1	SAE C 平键	-2	non SAE 平键						
-3	SAE C 花键	-4	non SAE 花键						
-5 (W)	non SAE 平键								
转向 :		R: 右转(顺时针) L: 左转 (逆时针)							
油口方向组合 :		S = 进油口		P1 , P2 = 出油口		详见第 22 页			
设计序号 :		A : 由生产商给定							
密封等级 :		1: S1 – 丁晴橡胶 : 矿物液压油				5: S5 – 氟橡胶 : 矿物基与抗燃液压油			
油口连接螺纹 :									
		公制	美制						
		M0	00						

T67DB 双联泵安装尺寸

重量 : 38.6kg

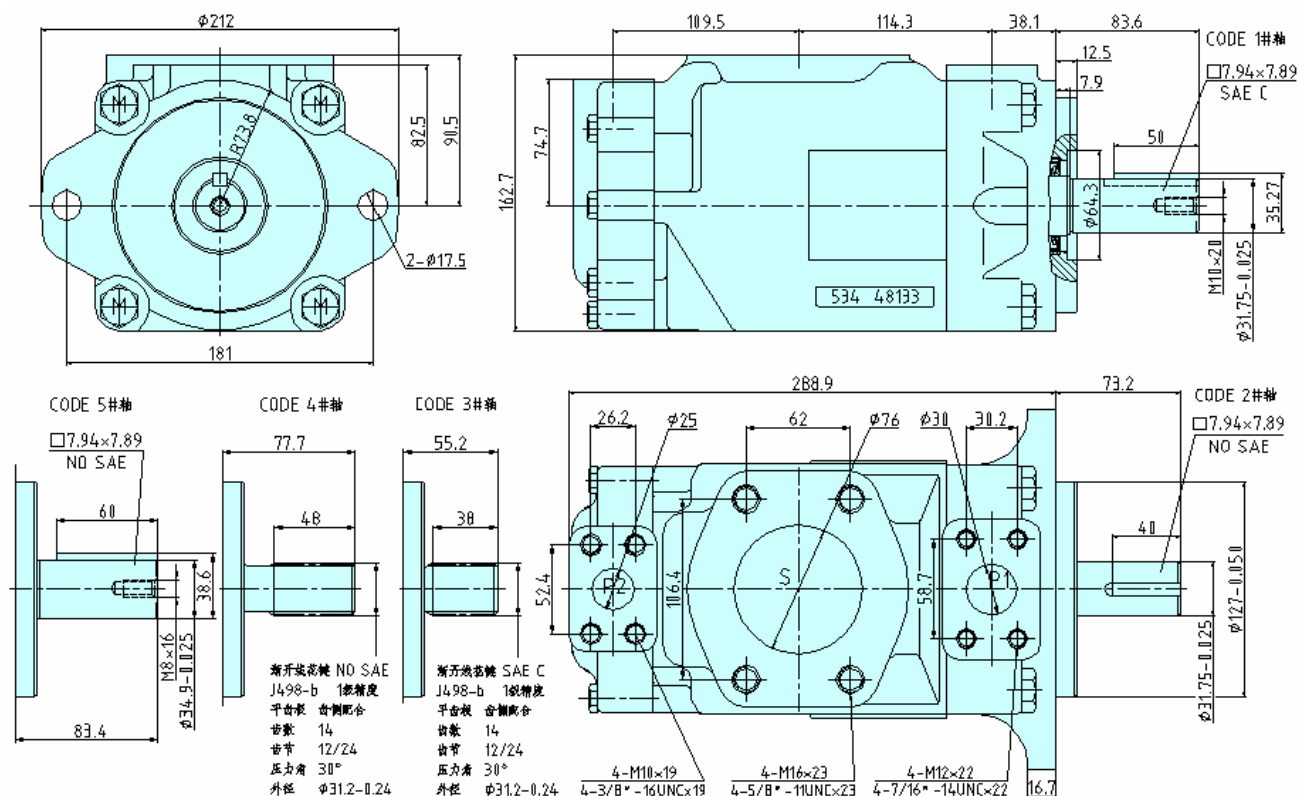


T7DBS 双联泵型号说明

型号	T7DBS(W)			-B42	-B10	-1	R	00	-A	1	00
高压叶片泵， 安装法兰 SAE C 2 螺孔。 W-重载轴											
P1 排量：ml / rev B14=43.2, B17=54.0, B20=64.8, B22=70.3, B24=79.6, B28=88.4, B31=97.4,B35=111.4,B38=118.5,B42=135.3,045=145.7,050=158.0											
P2 排量：ml / rev B02=5.8, B03=9.8, B04=12.8, B05=15.9, B06=19.6, B07=22.5, B08=24.8, B09=27.9, B10=31.5, B11=35.0, B12=40.5, B14=44.2, B15=49.4											
传动轴形式：											
-1	SAE C 平键	-2	non SAE 平键								
-3	SAE C 花键	-4	non SAE 花键								
-5 (W)	non SAE 平键										
转向： R: 右转（顺时针） L: 左转（逆时针）											
油口方向组合： S = 进油口 P1 , P2 = 出油口 详见第 22 页											
设计序号： A：由生产商给定											
密封等级： 1: S1 – 丁晴橡胶：矿物液压油 5: S5 – 氟橡胶：矿物基与抗燃液压油											
油口连接螺纹：											
		公制	美制								
		M0	00								

T7DBS 双联泵安装尺寸

重量：38.6kg

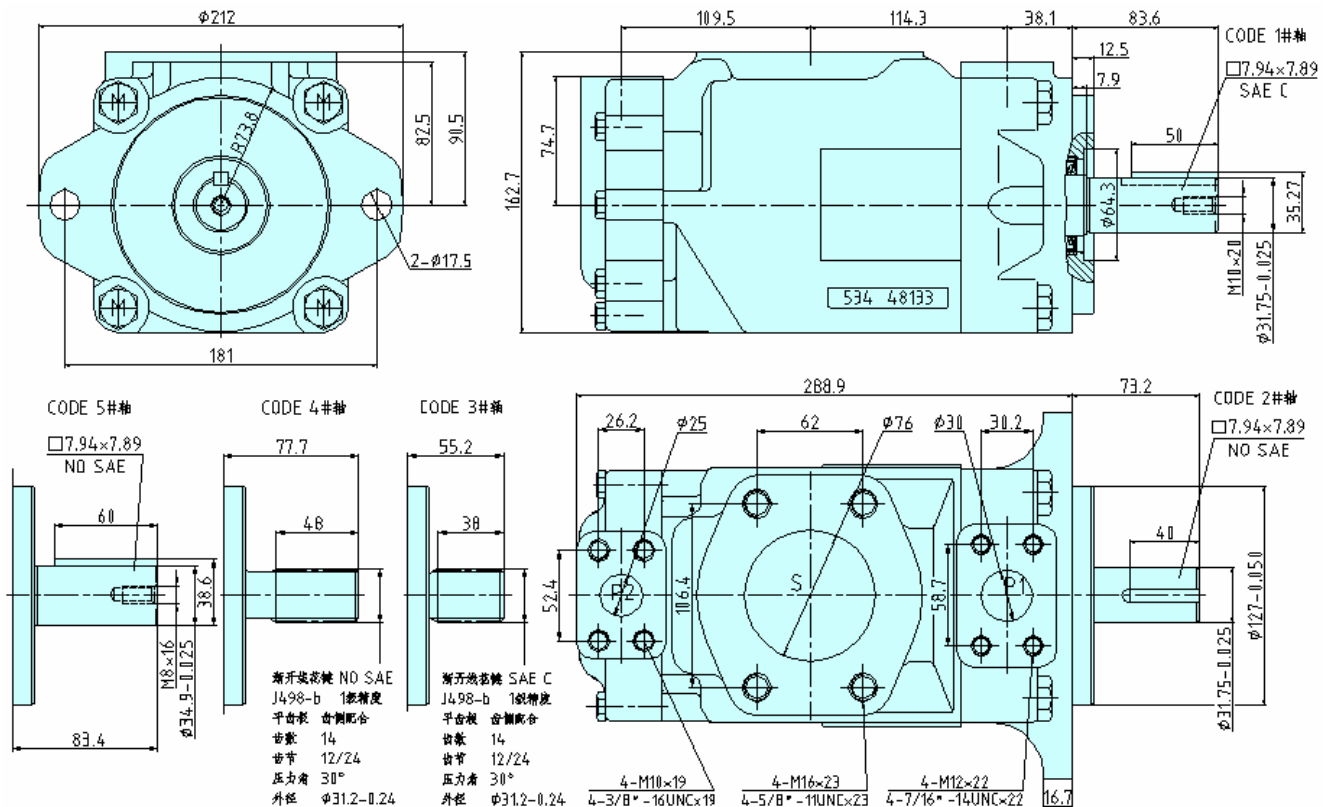


T6DC 双联泵型号说明

型号	T6DC(W)		-038	-010	-1	R	00	-B	1	M0
高压叶片泵, 安装法兰 SAE C 2 螺孔.										
W-重载轴										
P1 排量 : ml / rev										
014=47.5, 017=57.9, 020=65.7, 024=79.1, 028=88.9, 031=97.9										
035=112.4,038=120.7,042=136.0,045=146.0,050=156.7,061=189.5										
P2 排量 : ml / rev										
003=10.8, 005=17.2, 006=21.3, 008=26.4, 010=34.1,012=37.1, 014=46.0,										
017=58.3, 020=63.8, 022=70.3, 025=79.3, 028=88.8, 031=100.0										
传动轴形式 :										
-1	SAE C 平键		-2	non SAE 平键						
-3	SAE C 花键		-4	non SAE 花键						
-5 (W)	non SAE 平键									
转向 :			R: 右转 (顺时针) L: 左转 (逆时针)							
油口方向组合 :			S = 进油口		P1 , P2 = 出油口		详见第 22 页			
设计序号 :			B : 由生产商给定							
密封等级 :			1: S1- 丁晴橡胶 : 矿物液压油				5: S5- 氟橡胶 : 矿物基与抗燃液压油			
油口连接螺纹 :										
			公制		美制					
			M0		00(略)					

T6DC 双联泵安装尺寸

重量 : 38.6kg

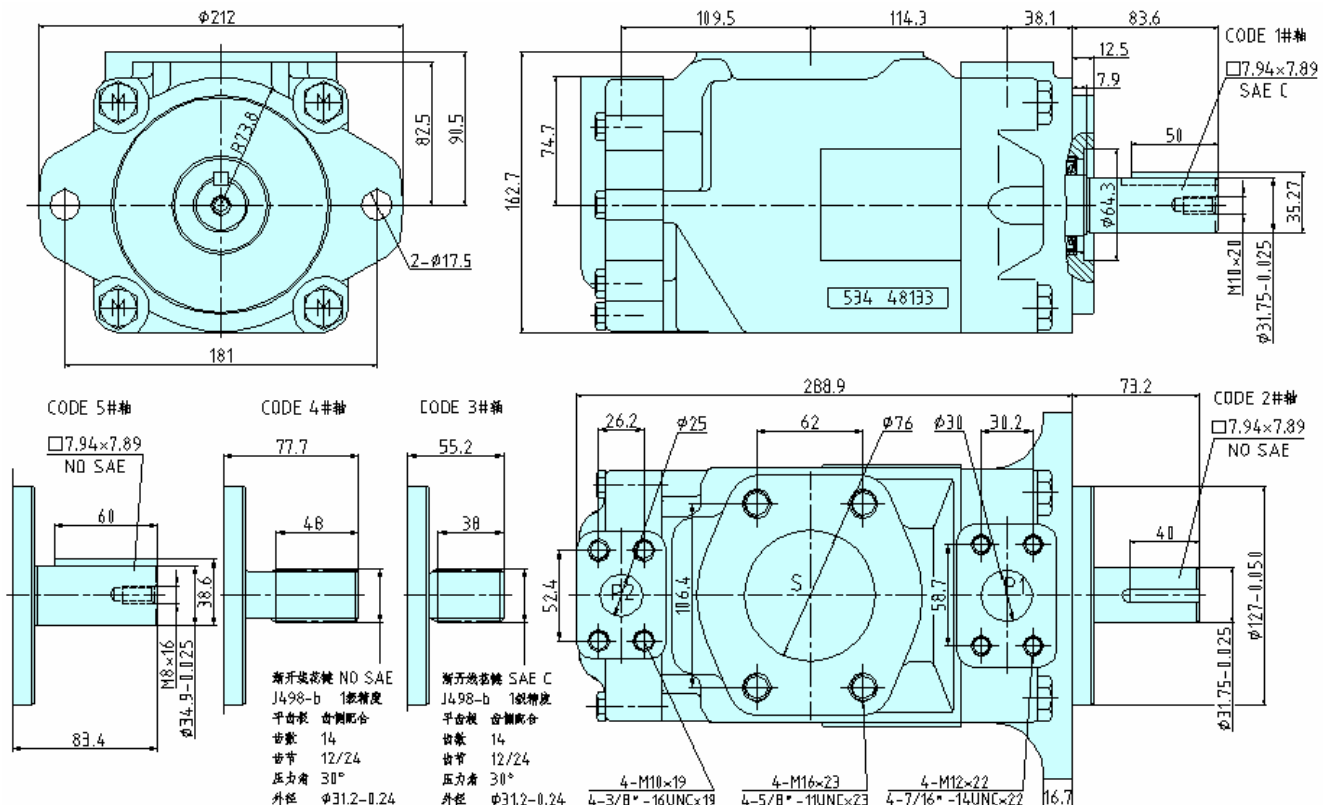


T67DC 双联泵型号说明

型号	T67DC (W)			-B42	-010	-1	R	00	-A	1	00
高压叶片泵, 安装法兰 SAE C 2 螺孔.											
W-重载轴											
P1 排量 : ml / rev											
B14=43.2, B17=54.0, B20=64.8, B22=70.3, B24=79.6, B28=88.4,											
B31=97.4,B35=111.4,B38=118.5,B42=135.3,045=145.7,050=158.0											
P2 排量 : ml / rev											
003=10.8, 005=17.2, 006=21.3, 008=26.4, 010=34.1,012=37.1, 014=46.0											
017=58.3, 020=63.8, 022=70.3, 025=79.3, 028=88.8, 031=100.0											
传动轴形式 :											
-1	SAE C 平键		-2	non SAE 平键							
-3	SAE C 花键		-4	non SAE 花键							
-5 (W)	non SAE 平键										
转向 :				R: 右转 (顺时针) L: 左转 (逆时针)							
油口方向组合 :				S = 进油口		P1 , P2 = 出油口		详见第 22 页			
设计序号 :				A : 由生产商给定							
密封等级 :				1: S1 - 丁晴橡胶 : 矿物液压油				5: S5 - 氟橡胶 : 矿物基与抗燃液压油			
油口连接螺纹 :											
				公制		美制					
				M0		00					

T67DC 双联泵安装尺寸

重量 : 38.6kg

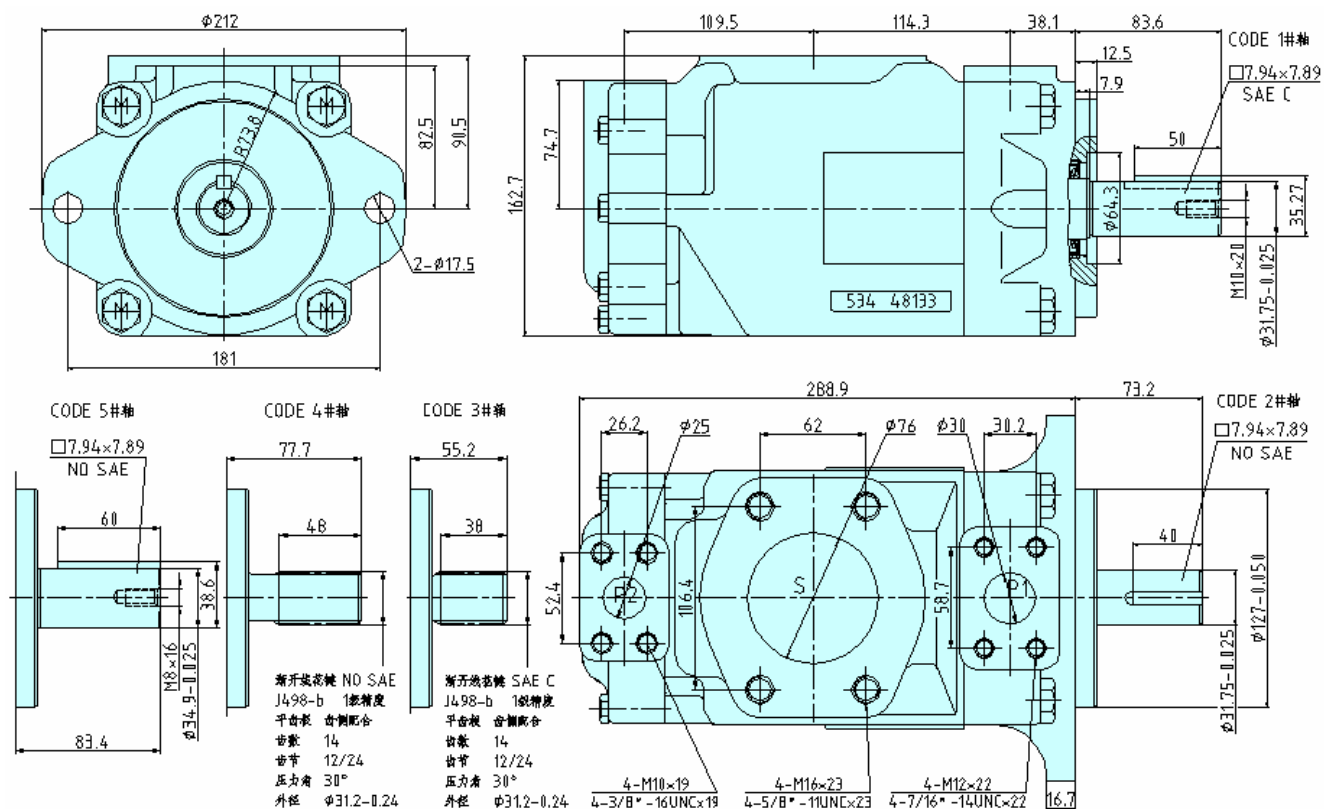


T7EBS 双联泵型号说明

型号	T7EBS	-042	-B12	-1	R	00	-A	1	00				
高压叶片泵, 安装法兰 SAE C 2 螺孔.													
P1 排量 : ml / rev													
042 = 132.3, 045 = 142.4, 050 = 158.5, 052 = 164.8, 054 = 171.0,													
057 = 183.3, 062 = 196.7066 = 213.3, 072 = 227.1, 085 = 268.7													
P2 排量 : ml / rev													
B02=5.8, B03=9.8, B04=12.8, B05=15.9, B06=19.6, B07=22.5, B08=24.8,													
B09=27.9, B10=31.5, B11=35.0, B12=40.5, B14=44.2, B15=49.4													
传动轴形式 :													
-1	SAE CC 平键	-2	non SAE 平键										
-3	SAE C 花键	-4	SAE CC 花键										
转向 :		R: 右转(顺时针) L: 左转(逆时针)											
油口方向组合 :		S = 进油口		P1 , P2 = 出油口		详见第 22 页							
设计序号 :		A : 由生产商给定											
密封等级 :		1: S1 - 丁晴橡胶 : 矿物液压油 5: S5 - 氟橡胶 : 矿物基与抗燃液压油											
油口连接螺纹 :													
		<table><tr><td>公制</td><td>美制</td></tr><tr><td>M0</td><td>00</td></tr></table>								公制	美制	M0	00
公制	美制												
M0	00												

T7EBS 双联泵安装尺寸
重量：55.0kg

重量：55.0kg

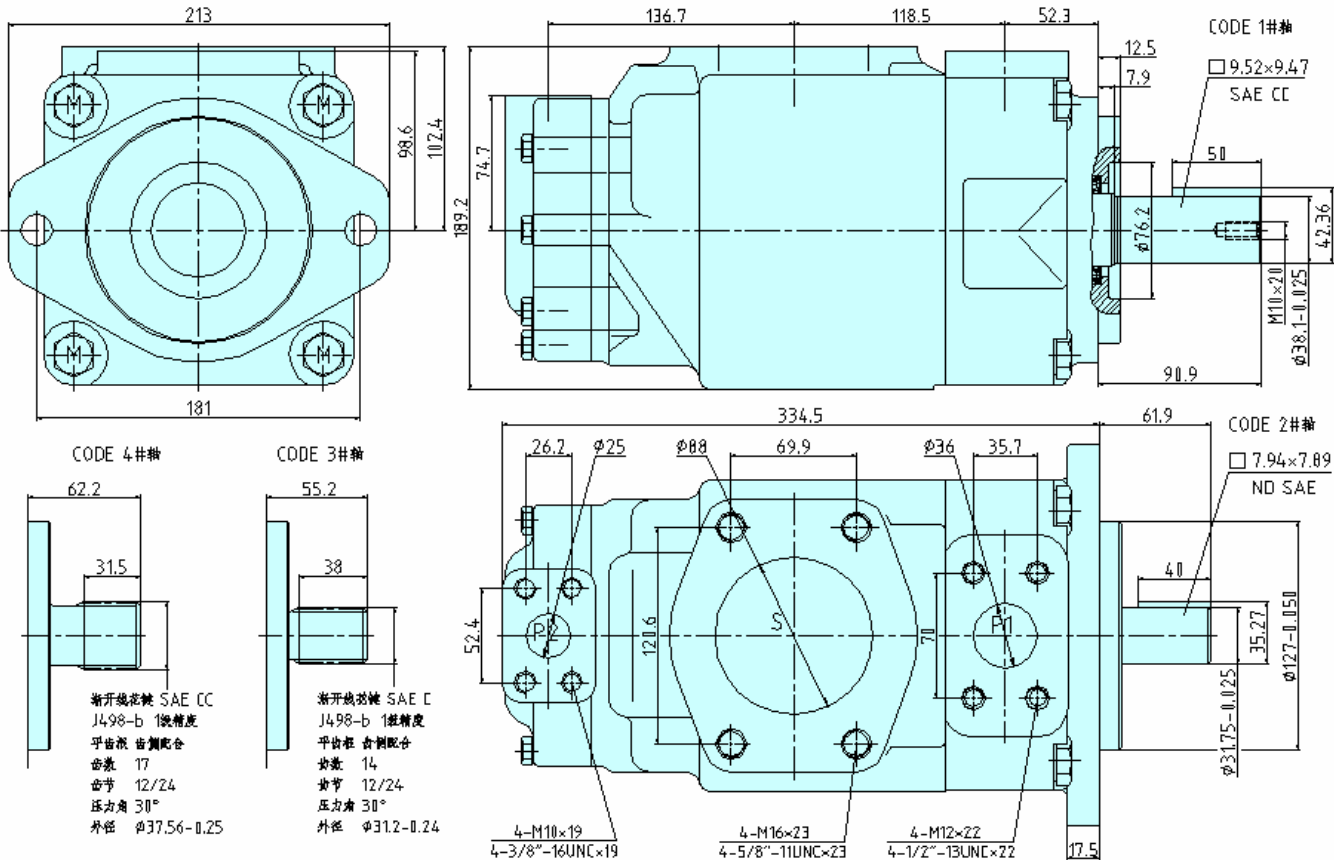


T6EC 双联泵型号说明

型号	T6EC	-085	-020	-1	R	00	-B	1	M0
高压叶片泵, 安装法兰 SAE C 2 螺孔.									
P1 排量 : ml / rev 042 = 132.3, 045 = 142.4, 050 = 158.5, 052 = 164.8, 054 = 171.0, 057 = 183.3, 062 = 196.7, 066 = 213.3, 072 = 227.1, 085 = 268.7									
P2 排量 : ml / rev 003=10.8, 005=17.2, 006=21.3, 008=26.4, 010=34.1, 012=37.1, 014=46.0 017=58.3, 020=63.8, 022=70.3, 025=79.3, 028=88.8, 031=100.0									
传动轴形式 :									
-1	SAE CC 平键	-2	non SAE 平键						
-3	SAE C 花键	-4	SAE CC 花键						
转向 :		R: 右转(顺时针) L: 左转 (逆时针)							
油口方向组合 :		S = 进油口		P1 , P2 = 出油口		详见第 22 页			
设计序号 :		B : 由生产商给定							
密封等级 :		1: S1- 丁晴橡胶 : 矿物液压油				5: S5- 氟橡胶 : 矿物基与抗燃液液压油			
油口连接螺纹 :									
		公制		美制					
		M0		00(略)					

T6EC 双联泵安装尺寸

重量 : 55.0kg

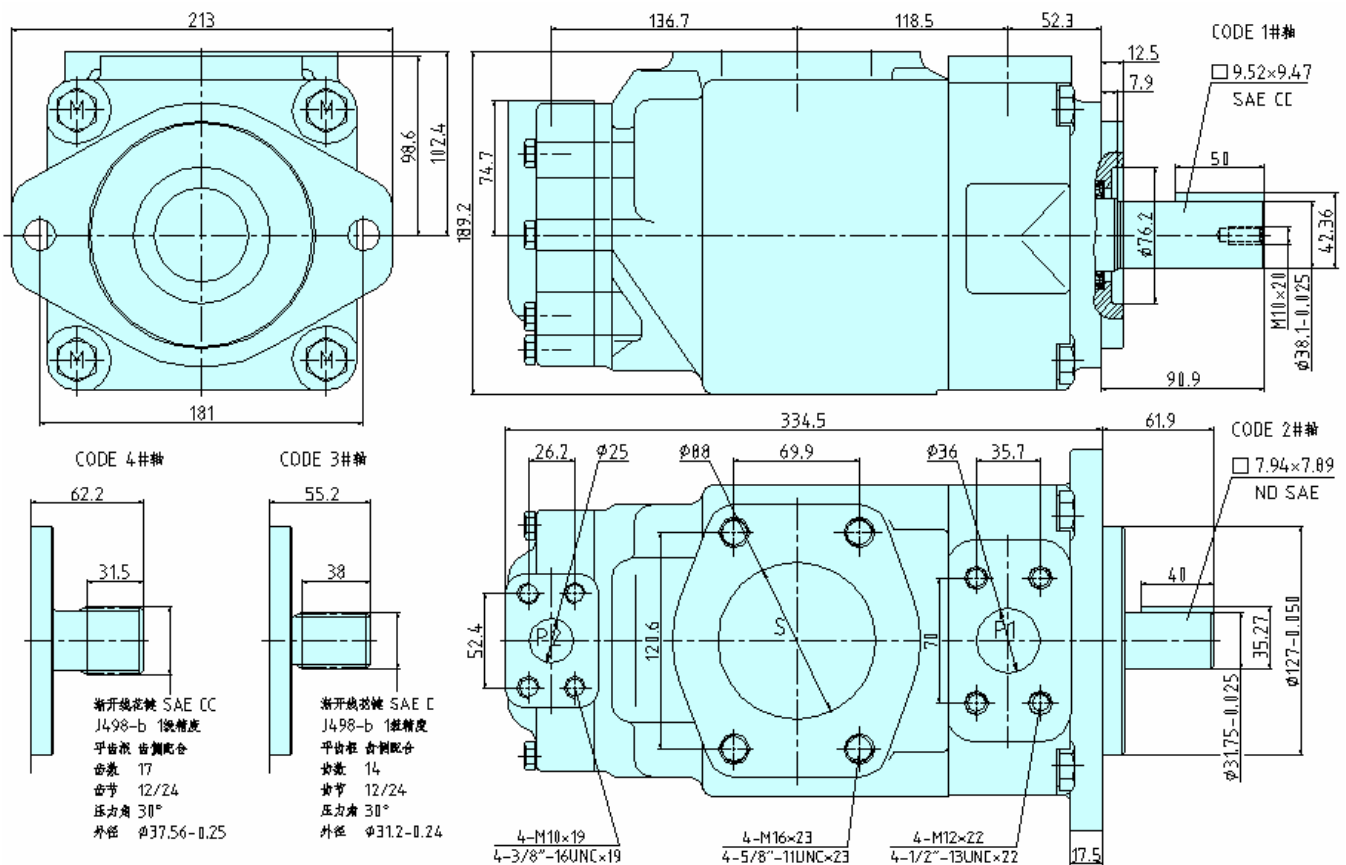


T6ED 双联泵型号说明

型号	T6ED	-085	-020	-1	R	00	-B	1	M0
高压叶片泵, 安装法兰 SAE C 2 螺孔.									
P1 排量 : ml / rev 042 = 132.3, 045 = 142.4, 050 = 158.5, 052 = 164.8,054 = 171.0, 057 = 183.3, 062 = 196.7,066 = 213.3, 072 = 227.1, 085 = 268.7									
P2 排量 : ml / rev 014=47.5, 017=57.9, 020=65.7, 024=79.1, 028=88.9, 031=97.9 035=112.4, 038=120.7, 042=136.0, 045=146.0, 050=156.7, 061=189.5									
传动轴形式 :									
-1	SAE CC 平键	-2	non SAE 平键						
-3	SAE C 花键	-4	SAE CC 花键						
转向 :		R: 右转(顺时针) L: 左转 (逆时针)							
油口方向组合 :		S = 进油口		P1 , P2 = 出油口		详见第 22 页			
设计序号 :		B : 由生产商给定							
密封等级 :		1: S1- 丁晴橡胶 : 矿物液压油				5: S5- 氟橡胶 : 矿物基与抗燃液压油			
油口连接螺纹 :									
		公制		美制					
		M0		00(略)					

T6ED 双联泵安装尺寸

重量 : 66.0kg

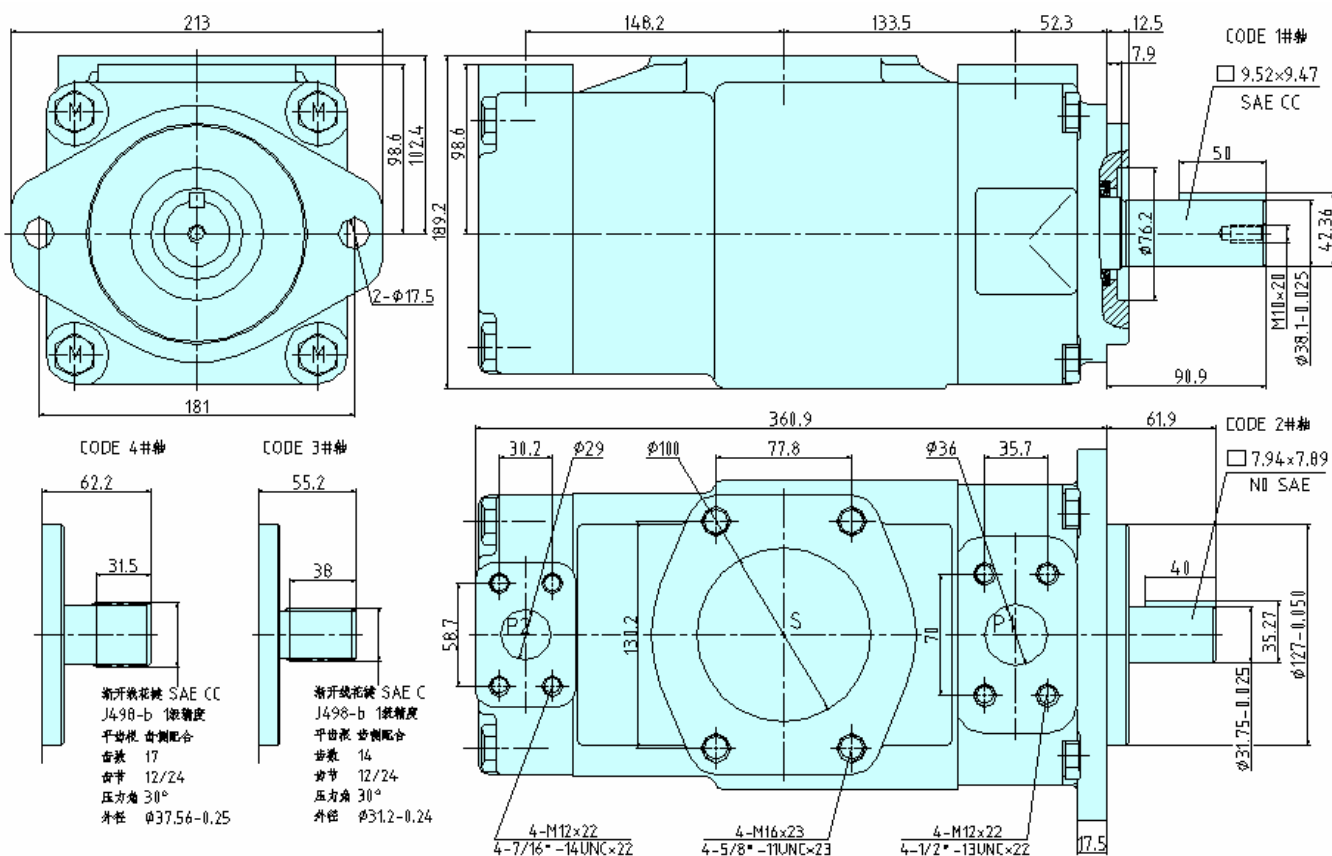


T7EDS 双联泵型号说明

型号	T7EDS	-042	-B22	-1	R	00	-A	1	00		
高压叶片泵, 安装法兰 SAE C 2 螺孔.											
P1 排量 : ml / rev 042 = 132.3, 045 = 142.4, 050 = 158.5, 052 = 164.8, 054 = 171.0, 057 = 183.3, 062 = 196.7, 066 = 213.3, 072 = 227.1, 085 = 268.7											
P2 排量 : ml / rev B14=43.2, B17=54.0, B20=64.8, B22=70.3, B24=79.6, B28=88.4, B31=97.4, B35=111.4, B38=118.5, B42=135.3, 045=145.7, 050=158.0											
传动轴形式 :											
<table><tr><td>-1</td><td>SAE CC 平键</td><td>-2</td><td>non SAE 平键</td></tr><tr><td>-3</td><td>SAE C 花键</td><td>-4</td><td>SAE CC 花键</td></tr></table>										-1	SAE CC 平键
-1	SAE CC 平键	-2	non SAE 平键								
-3	SAE C 花键	-4	SAE CC 花键								
转向 : R: 右转(顺时针) L: 左转 (逆时针)											
油口方向组合 : S = 进油口 P1 , P2 = 出油口 详见第 22 页											
设计序号 : A : 由生产商给定											
密封等级 : 1: S1 - 丁晴橡胶 : 矿物液压油 5: S5 - 氟橡胶 : 矿物基与抗燃液压油											
油口连接螺纹 :											
公制		美制									
M0	00										

T7EDS 双联泵安装尺寸


重量 : 66.0kg

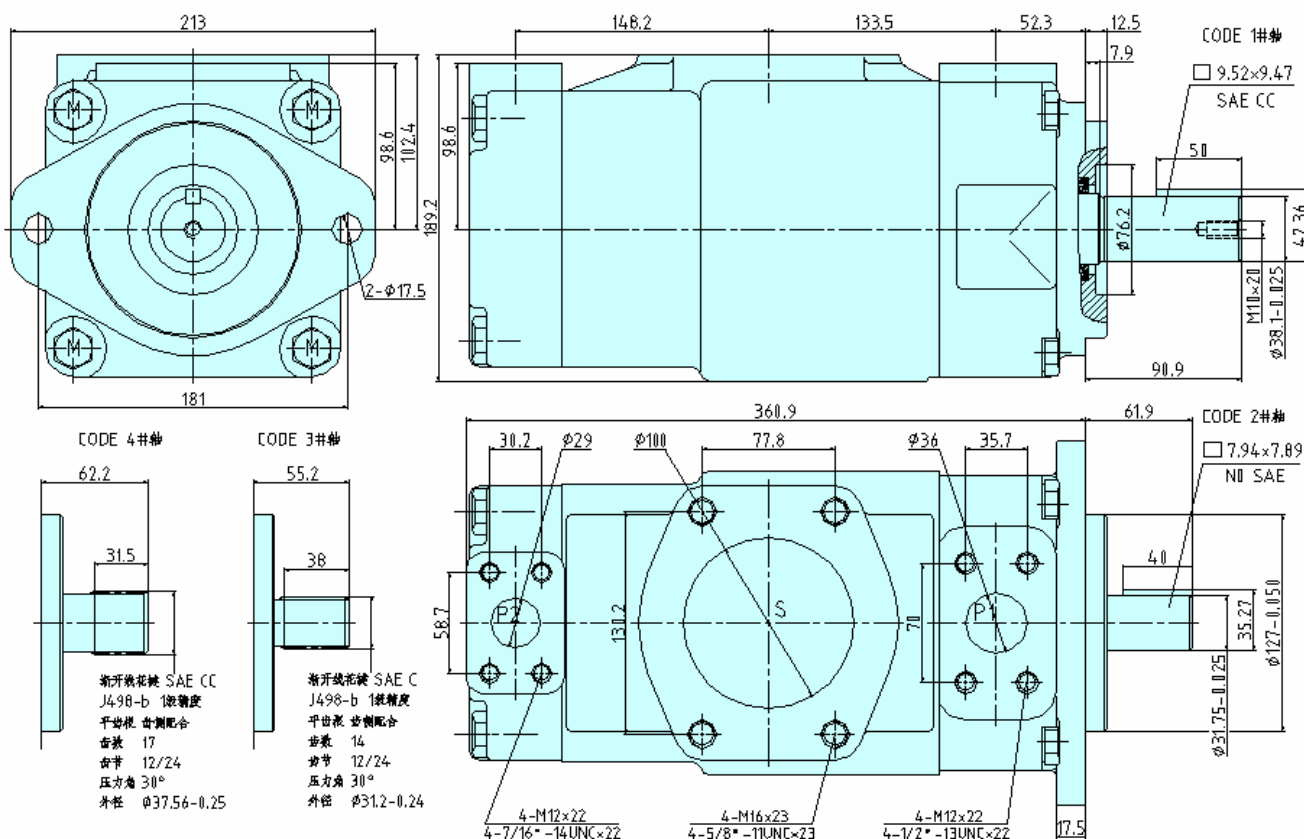

泵轴最大扭矩

	轴 的 最 大 扭 矩 [ml/rev × bar]			
泵	单 联 泵		双 联 泵	
型号	传动轴形式	排量 (ml/rev) × 压力 (bar)	传动轴形式	排量 (ml/rev) × 压力 (bar)
T67B T7BS	-1	16340	-1	14300
T6C	-2	14300	-2	21420
T67BB	-3	20600	-3	32670
T67CB	-4	21800	-5	20600
T6CC				
T6D	-1	43240	-1	43240
T7DS	-2	34590	-2	34590
T67DB	-3	61200	-3	61200
T7DBS	-4	61200	-4	61200
T6DC				
T67DC	\	\	-5	45200
T6E T7ES	-1	54500	-1	54500
T7EBS	-2	34590	-2	34590
T6EC	-3	61200	-3	61200
T6ED	-4	61200	-4	61200
T7EDS				

双联泵油口方向组合

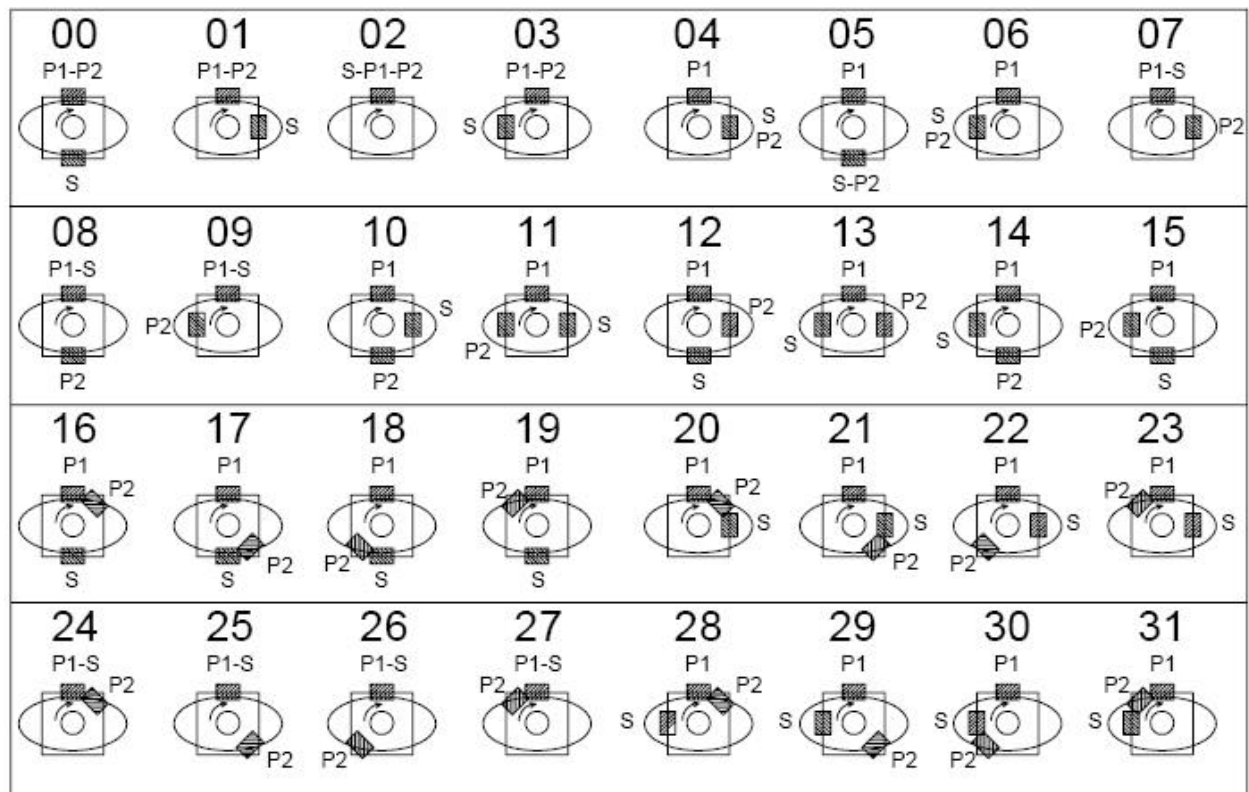

派克汉尼汾液压系统（上海）有限公司

中国上海市金桥出口加工区云桥路 280 号

邮编：201206

电话：(86-21) 5031 2525

传真：(86-21) 6455 9717

电子邮件：infohcd@parker.com

生产厂：上海丹尼逊液压件有限公司

上海市闵行区莘朱路 2228 号

邮编：200237

电话：(86-21) 6455 2002

传真：(86-21) 5463 1250

电子邮件：info272@parker.com